


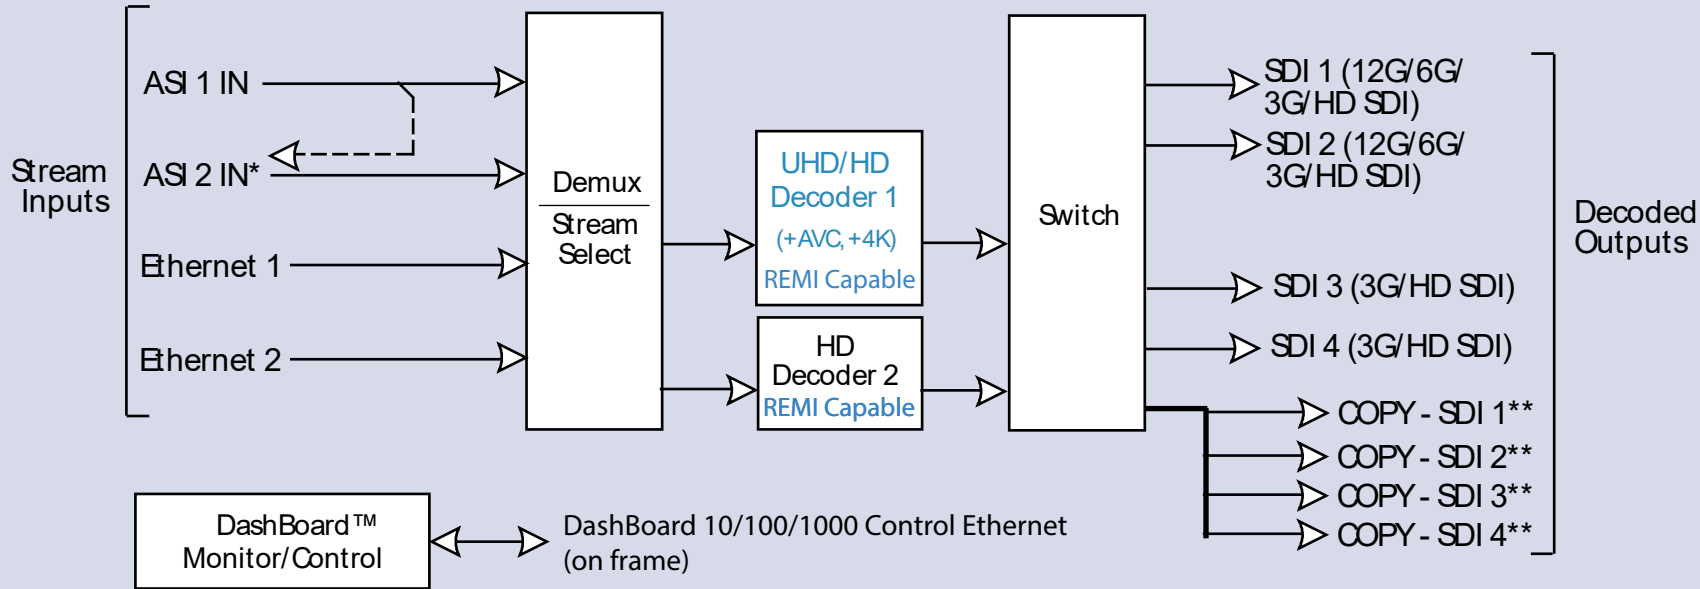

* ASI 2 IN BNC selectable as ASI 2 IN stream decode source (default mode)
or as alternate which instead provides loop-thru ASI 1 output copy.

** Output copies are disabled if the decoder is in 12G mode.

this color denotes option

PACIFIC ULL-DEC